

Model EPD/EPPD PRO Drainer™ sump, drainage



EBARA
EBARA
EBARA
EBARA

Model EPD / EPPD


Features

- High quality stainless steel (*Note:* Model EPPD has Noryl impeller and diffuser)
- Available in 1/3, 1/2, 3/4, 1 1/2 models
- Single and three phase models available
- Air filled, continuous duty rated, permanent split capacitor motors
- Built-in thermal protection with automatic reset
- Built to operate whether fully or partially submerged
- Oil lubricated double mechanical shaft seal
- Temperature rating to 122°F/50°C; 140°F/60°C intermittent duty
- 20' UL/CSA approved, water resistant #16 AWG cord
- Capacities to 88 GPM, heads to 62 feet

Applications

- Residential
- Commercial
- Industrial
- Drainage
- Seepage
- Effluent/containment transfer
- Waste water (from trays, wet bars, washing machines)
- Empty water storage structures
- Decorative fountains
- Irrigation
- Mound systems, leach fields
- Move water/effluent to sewage systems

EPD, EPPD selection chart

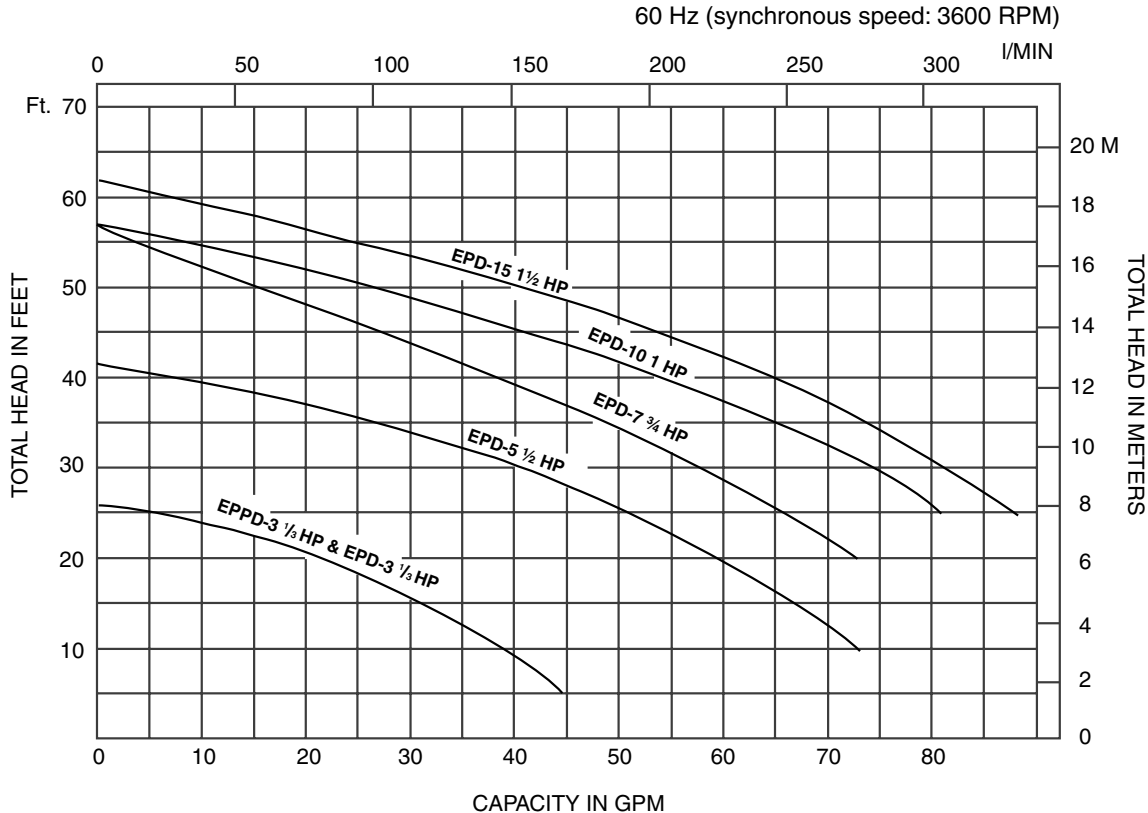

EBARA International Corporation

Standard Pump Division

1651 Cedar Line Drive • Rock Hill, SC 29730 • (t) 803 327 5005 • (f) 803 327 5097

info@pumpsebara.com • www.pumpsebara.com

© 2000 EBARA International Corporation

EICEPD 1104